


# Encapsulated Thermostats

## Special Order Map for SEO (T) Series

### Build Your Own Part



#### Model

- T16 Without bracket - stainless steel cover (refer to page 23)
- T17 Auxiliary clip mount - stainless steel cover - 3/8" clip (refer to page 23)
- T21 With bracket - stainless steel cover (refer to page 24)
- T22 Auxiliary clip mount - stainless steel cover - 3/8" and 1/2" clips (refer to page 24)
- T60 Plastic body (refer to page 24)

#### Electrical Function

- 1 S.P.S.T. - Open on-rise (normally closed)
- 2 S.P.S.T. - Close on-rise (normally open)
- 3 S.P.D.T. (T21 and T22 models only)

Set Point (specify in °F)


Differential (specify in °F)

Lead Length (specify in inches) - standard lead length: 6"

#### Tube Size

- 1 3/8" ( T17, T22 and T60 models only)
- 2 1/2" (T22 model only)
- 3 5/16" (T60 model only)

### Example Part Number

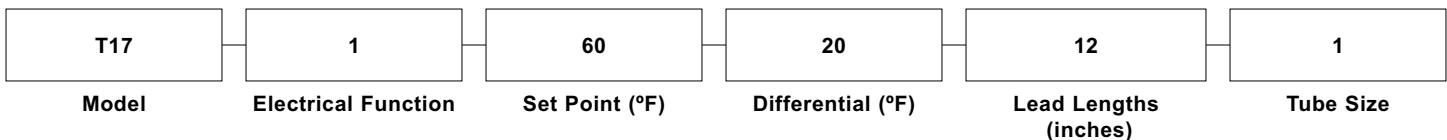

It is the customer's sole responsibility to specify and determine the suitability of a particular control or component based on their unique individual applications and requirements

(714) 917-1333 • (800) 257-3526 • FAX (714) 917-1355 • E-mail: sales@selcoproducts.com